


# Custom Glass Fabrication Capabilities Technical Capabilities Brochure

10/21

**Edging** - Finishing the sharp edges of cut glass is applied for safe handling, chip reduction, or aesthetics. At Abrisa Technologies, we provide angled and multilevel bevels, seams, corner dubbing, circle or flat ground, pencil, and polished edging.

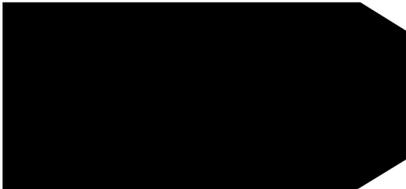


**Flat Ground Edges** - Diamond embedded grinding wheels put a satin finish on the edge.



**Flat Polish Edges** - Taking a ground edge another step, polishing the edges to give the glass a nice sheen finish.



**Flat Polish Edges with Arris** - This is a flat polished edge with polished chamfers (Arris).

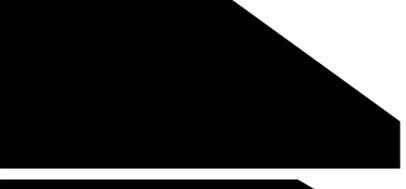

**Pencil Ground Edges** - Diamond embedded grinding wheels put a satin finish on the edge, with an edge radius similar to pencil or C-shape.



**Pencil Polished Edges** - Edges are polished to a sheen finish, with radius similar to pencil or C-shape.



**Safety Seamed Edge** - (Swiped Edge, chamfered edge)  
A sanding belt is used to lightly sand off the sharp edge of the glass.



**Dubbed Corners** - The sharp edge of each corner can be nubbed or broken as required (chamfered or radius corner).



**Stepped and Route Surfaces** - Glass is ground away to leave a step or lip.

**Beveled Edges** - (3) styles - Ground or polished bevels on glass or mirror, circles, rectangles to any degree can be provided

**Bullnose Edges (Half & Full)** - These are typically polished edges (can be ground if required) that are similar to pencil edges, the difference being that the bullnose edge is a full radius curve where the diameter matches the thickness of the glass substrate. There are specific profiles where the relief angles can be different, typically where aesthetics are important or for critical applications where the edge of the glass could affect functionality.

**General specifications for edging glass substrates are:**

- Minimum Substrate Thickness:** 0.020" (0.5 mm)
- Maximum Substrate Thickness:** 1" (25.4 mm) – will have overall size limitations
- Tolerances:** ±0.001" to ±0.010" dependent upon size and shape of glass parts
- Maximum Substrate Size:** 110" x 60" (2794 mm x 1524 mm) up to 6 mm thick at this size. Can provide edge treatments for thicker substrates in smaller sizes, consult factory.