



Product Information: FRONT SURFACE MIRROR

08/11


Enhanced aluminum mirrors are front surface mirrors over-coated with dielectric layers to increase reflectivity and protect against humidity and abrasion.

Mirror coatings conform to specifications:

- MIL-C-48497**
- MIL-M-1350BC**
- MIL-STD-810 C**

The substrate is selected float glass with typical flatness and irregularity of 2 waves per inch.

Stock thicknesses: .040", .060", .125", .230", .380"
Size: Up to 32" x 50"
 Custom thickness on request.

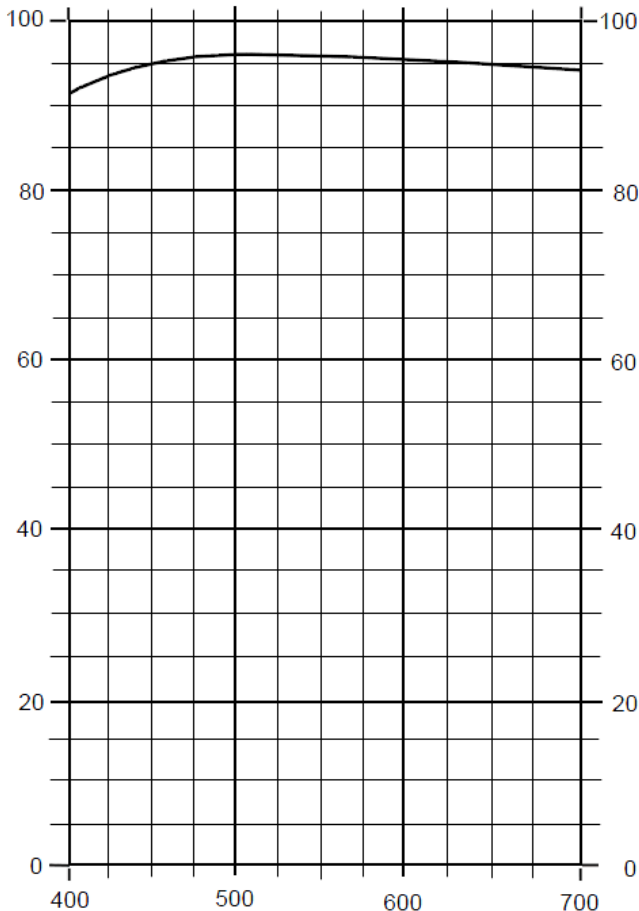

Wave Length (nm)	Angles in Degrees			
	45	15	30	45
400	92	90	92	93
450	93	94	94	94
550	94	95	95	94
600	90	93	93	92