



**Product Information: MIRRORS - ENHANCED ALUMINUM**

**08/11**


Enhanced aluminum mirrors are front surface mirrors over-coated with dielectric layers to increase reflectivity and protect against humidity and abrasion.

Mirror coatings conform to specifications:

- MIL-C-48497**
- MIL-M-1350BC**
- MIL-STD-810 C**

The substrate is selected float glass with typical flatness and irregularity of 2 waves per inch.

**Stock Thicknesses:** .040", .060", .125", .230", .380"  
**Size:** Up to 32" x 50"  
 Custom thickness on request.

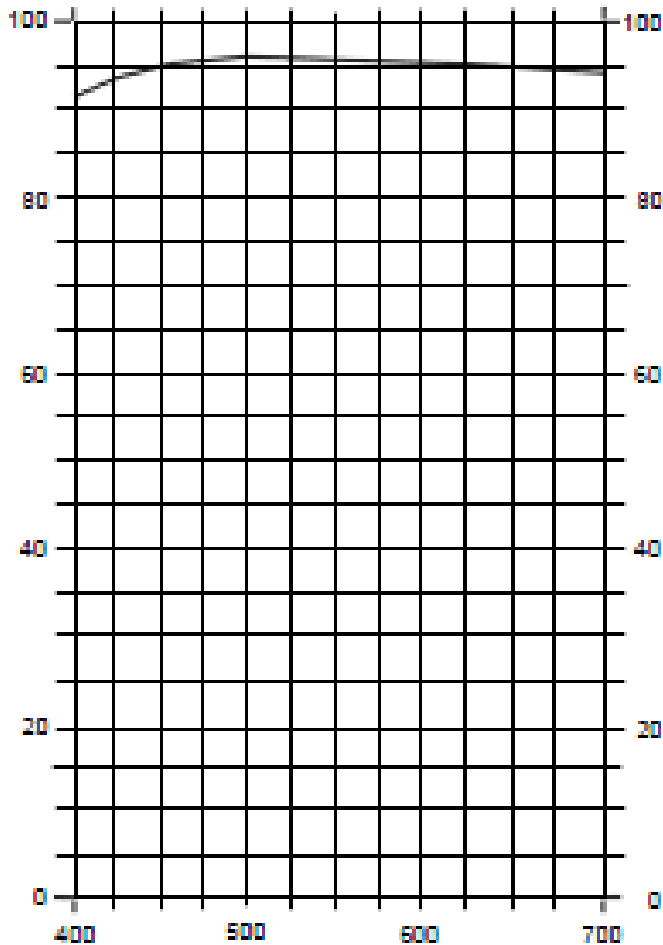

Wave Length (nm)	Minimum Reflectance (Percent)	Typical Reflectance (Percent)
<u>Angle in Degrees</u>	<u>45</u>	<u>15</u>
400	92	90
450	93	94
550	94	95
600	90	93